

**OTL
SERIES**



**WHEEL TYPE
TANDEM DISC HARROW**



DOMRIES ENTERPRISES, INC
12281 Road 29
Madera, California 93638
Office (559) 673-9143 Fax (559) 673-4110
Visit our website @ www.domries.com



OTL-SPECIFICATIONS

MODEL	WIDTH OF CUT	SIZE BLADES	NO. BLADES	BLADE EDGE		SPACING ALL	APPROX. REQ. P.T.O./H.P.	APPROX. WT. LBS.
				FRONT	REAR			
OTL-99-2820	10'10"	22"	28	SM	SM	9	50-70	3038
OTL-99-2840	11'1"	24"	28	SM	SM	9	50-70	3214
OTL-99-3220	12'4"	22"	32	SM	SM	9	60-80	3186
OTL-99-3240	12'6"	24"	32	SM	SM	9	60-80	3389
OTL-99-3620	13'9"	22"	36	SM	SM	9	70-90	3446
OTL-99-3640	14'0"	24"	36	SM	SM	9	70-90	3674
OTL-99-4020	15'3"	22"	40	SM	SM	9	80-95	3569
OTL-99-4040	15'6"	24"	40	SM	SM	9	80-95	3822
OTL-99-4420	16'8"	22"	44	SM	SM	9	85-100	3692
OTL-99-4440	16'11"	24"	44	SM	SM	9	85-100	3970

* see price sheet for notched and smooth combinations



HEAVY DUTY AXEL SHAFT




SINGLE TONGUE IS STANDARD
DOUBLE LIP AS AN OPTION



MOUNTED TURNBUCKLE
ADJUSTS HITCH TO
TRACTOR HEIGHT.

OPTIONS

- BLADE CLEANERS
- UTILITY HITCH
- DRAG BRACKETS
7" OR 16" EXT.
- FRONT DIRT DEFLECTERS
- ADD-A-BLADE EXTENSIONS

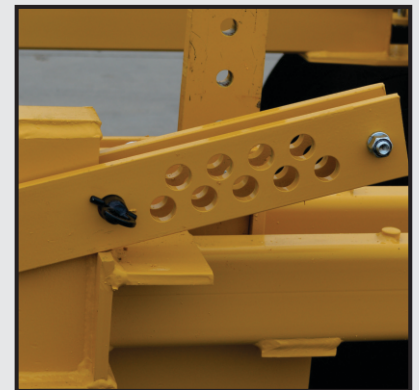

DEPTH CONTROL

DOMRIES ENTERPRISES, INC

12281 Road 29
Madera, California 93638
Office (559) 673-9143 Fax (559) 673-4110
Visit our website @ www.domries.com



Domries reserves the right to make changes and/or improvements in design and construction of parts and/or machines shown herein without notice or obligation