


**BTO-20-W
SERIES**

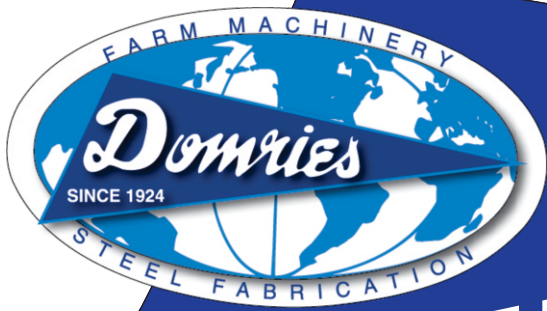

**WHEEL TYPE
OFFSET DISC HARROW**

**ROAD
LEGAL**

**WINGFOLD
OFFSET**



TRANSPORT WIDTH 8' OVERALL



DOMRIES ENTERPRISES, INC

12281 Road 29

Madera, California 93638

Office (559) 673-9143 Fax (559) 673-4110

Visit our website @ www.domries.com



BTO-20-W SPECIFICATIONS

MODEL	WIDTH CUT	NO. BLADES	WORKING WEIGHTS		APPROXIMATE DRAWBAR POWER		
			MACHINE	PER BLADE	HP@4 m.p.h.	HP@6 m.p.h.	LBS. PULL
BTO-20-W-4041	15'0"	40	6673	167	90	125	7475
BTO-20-W-4241	15'9"	42	6776	162	100	135	7589
BTO-20-W-4441	16'6"	44	6879	157	110	145	7705
BTO-20-W-4641	17'3"	46	6982	151	120	160	7802

STANDARD EQUIPMENT

- 9" BLADE SPACING FRONT & REAR
- STEEL FABRICATED SPOOL
- 1 1/2" SQ. HIGH CARBON GANG RODS
- GANG BEARINGS TRIPLE SEALED
- BEARING WEAR GUARDS
- WHEEL BEARINGS AND HUB 5,000 LBS.
- SLIP IN WHEEL SPINDLES
- 2" DIA. HIGH CARBON STEEL SLIP IN SPINDLE
- TIRES TUBLESS, 9.5L X 15 PLY
- TWO 3 1/2" X 12" 2,500 P.S.I. HYD. WHEEL CONTROL
- HITCH JACK
- (4) 2" X 8" 2,500 P.S.I. HYD. CYLINDERS WINGS
- FRONT & REAR ANGLE SET, 16 TO 18 DEGREE ANGLE SETTING

- TONGUE SINGLE
- TRANSPORT SAFETY LOCK PIN
- HYD. HOSE KIT & HOSE GUIDE
- SAFETY TOW CHAIN

OPTIONAL EQUIPMENT

- BLADE CLEANERS
- BLADE COMBINATIONS
- BOLT ON REAR UTILITY HITCH
- ADD-A-BLADE EXTENSION



THE BTO-WINGFOLD OFFSET HAS PIN UP, LOCK DOWN WINGS, THAT WILL GIVE A LEVEL FINISHED FIELD.



8' LEGAL WIDTH FOR HAULING AND TOWING

DOMRIES ENTERPRISES, INC

12281 Road 29
 Madera, California 93638
 Office (559) 673-9143 Fax (559) 673-4110
 Visit our website @ www.domries.com



Domries reserves the right to make changes and/or improvements in design and construction of parts and/or machines shown herein without notice or obligation