


**HWO
SERIES**



**WHEEL TYPE
OFFSET DISC HARROW**

**HEAVY DUTY
LOW PROFILE**

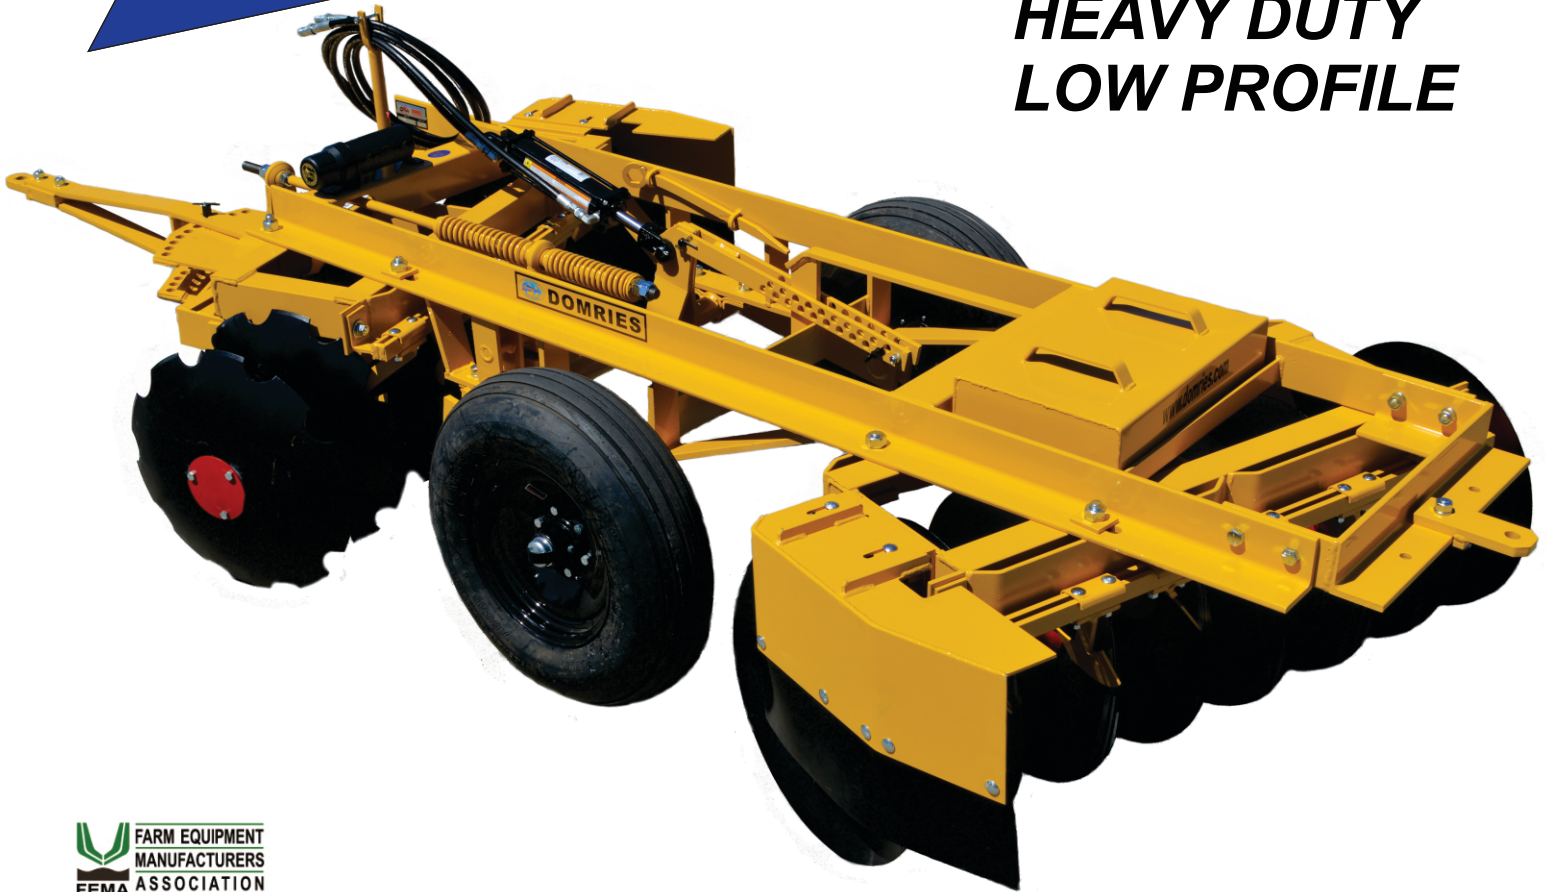

**ORCHARD &
OPEN FIELD**

DOMRIES ENTERPRISES, INC

12281 Road 29

Madera, California 93638

Office (559) 673-9143 Fax (559) 673-4110

Visit our website @ www.domries.com



HWO SPECIFICATIONS

MODEL	WIDTH	NO. BLADES	BLADE SIZE	SPACING	APPROX. WT. LBS.
HWO 5320	5'3"	14	22"	9"	2160
HWO 6020	6'0"	16	22"	9"	2240
HWO 6040	6'0"	16	24"	9"	2170
HWO 6920	6'9"	18	22"	9"	2210
HWO 6940	6'9"	18	24"	9"	2310
HWO 7620	7'6"	20	22"	9"	2510
HWO 7640	7'6"	20	24"	9"	2610
HWO 8320	8'3"	22	22"	9"	2780
HWO 8340	8'3"	22	24"	9"	2890
HWO 9020	9'0"	24	22"	9"	3040
HWO 9040	9'0"	24	24"	9"	3160
HWO 9940	9'9"	26	24"	9"	3397
HWO 10640	10'6"	28	24"	9"	4145
HWO 12040	12'0"	32	24"	9"	4430

NOTE. SEE PRICE SHEET FOR NOTCHED AND SMOOTH BLADES COMBINATIONS OFFERED.

STANDARD FEATURES

SPLIT AXLE ADJUSTMENT-ON 6'0" TO 9'9" SIZE

BEARINGS-TRIPLE SEALED BALL BEARINGS SELF ALIGNING

TIRES-7.60 X 15 - 6 PLY RIBBED / DUAL TIRES ON 10'6" AND 12'0"

GANG RODS- 1 1/2" SQ. PLOW STEEL

HYD. CYLINDER- HI PRESSURE 3" X 10"

GANG SETTING- REAR GANG SET LEFT OR RIGHT BY PULLING OR BACKING TRACTOR

DEPTH SETTING- SET BAR WITH 19 DEPTH SETTINGS HOLES

CONSTRUCTION- MAIN FRAME AND GANG FRAMES,HEAVY ANGLE IRON BRACED AND WELDED FOR MAXIMUM STRENGTH AND RIGIDITY

OPTIONAL

CLEANERS- DOUBLE BAR CONSTRUCTION

ADD-A-BLADE EXTENSIONS

DIRT SHIELDS

TOW HITCH-SINGLE LIP OR CLEVIS TYPE

DOMRIES ENTERPRISES, INC

12281 Road 29

Madera, California 93638

Office (559) 673-9143 Fax (559) 673-4110

Visit our website @ www.domries.com



Domries reserves the right to make changes and/or improvements in design and construction of parts and/or machines shown herein without notice or obligation